Required Tools:

- 3 plastic or unwaxed paper containers with clear volume measurements, smooth walls and flat bottom
- 3 Stir Sticks
- Plastic spreader or squeegee
- Disposable brush
- Waxed paper, newspaper or plastic drop cloth
- Latex, vinyl, or chemical-resistant safety gloves

Complete instructions included in box

Varathane Super Glaze is an ultra-thick, high gloss, Crystal Clear epoxy that provides maximum durability. Ideal as a waterproof finish for table and bar tops, it is also great for decorative projects and refinishing furniture. It can be used over almost any interior surface: from rough and unfinished to stained, painted or smooth surfaces. Read, understand, and follow all instructions included in this kit before using.



Measure:

Measure equal

volume of part A

separate containers.



Thoroughly mix part A with part B using a and part B'into clean clean stir stick.



Pour mixture over the entire surface and spread.

	Unit Size	Sq. Feet*
	Pint (16 oz.)	3.1
	Quart (32 oz.)	6.2
ı	Gallon (128 oz.)	24.8

*Based on almost 1/16" thickness

THICKNESS COMPARISON

One pour of Super Glaze is One coat of regular poly. equal to 75 coats of poly. Dries to .82 mils thick Dries to 61.5 mils thick





Maximum VOC content of this product is less than 100 g/L when mixed.

CONTAINS EPOXY RESIN, BRANCHED NONYLPHENOL, AMINES AND PROPYLENE CARBONATE. Causes nose and throat irritation. May cause allergic respiratory reaction. May cause allergic skin reaction. Harmful if swallowed. Use only with adequate ventilation. Avoid breathing dust, vapors, or spray mist. Ensure fresh air entry during application and drying. If you experience eye watering, headache, or dizziness or if air monitoring demonstrates vapor/mis levels are above applicable limits, wear and appropriate, properly fitted respirator (NIOSH approved) during and after application. Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. KEEP OUT OF REACH OF CHILDREN

First Aid In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean contaminated shoes. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical attention immediately. If swallowed, do not induce vomiting. Get medical attention immediately. For emergency, call your physician, local poison control center or local emergency room. For product health information, call: (800)481-4785.

DISPOSAL: Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum Product Support at 1-800-901-0411 for product replacement or a full refund of the purchase price. Refer to product number and batch code.

RUST-OLEUM

CORPORATION
11 Hawthorn Pkwy., Vernon Hills, IL 60061 800-901-0411 rustoleum.com/varathane Made in USA | Hecho en E.U.A. ©2020 Rust-Oleum Corporation 328669 1020



(Varathane. **SUPER GLAZE ULTRA THICK CLEAR FINISH**

CRYSTAL CLEAR



POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / CLEAR RESIN

Maximum Durability Resists Heat & Chemicals Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more 1QT (32 FL OZ) 946mL



SUPER GLAZE

ULTRA THICK CLEAR FINISH





POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / CLEAR RESIN

Maximum **Durability**

Resists Heat & Chemicals

Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more



BREATHTAKING CREATIONS



BEAUTIFUL TABLE TOPS



ENHANCED DECORATIVE PROJECTS



MAXIMUM DURABILITY





Required Tools:

- 3 plastic or unwaxed paper containers with clear volume measurements, smooth walls and flat bottom
- 3 Stir Sticks
- Plastic spreader or squeegee
- Disposable brush
- Waxed paper, newspaper or plastic drop cloth
- · Latex, vinvl, or chemical-resistant safety gloves

Complete instructions included in box

Varathane Super Glaze is an ultra-thick, high gloss, Charcoal tinted epoxy that provides maximum durability. Ideal as a waterproof finish for table and bar tops, it is also great for decorative projects and refinishing furniture. It can be used over almost any interior surface; from rough and unfinished to stained, painted or smooth surfaces. Read, understand, and follow all instructions included in this kit before using.






clean stir stick.

Sq. Feet*

3.1

6.2

24.8



Thoroughly mix part A with part B using a Pour mixture over the entire surface and spread.

One pour of Super Glaze is One coat of regular poly. equal to 75 coats of poly. Dries to .82 mils thick Dries to 61.5 mils thick

THICKNESS COMPARISON





*Based on almost 1/16" thickness

Measure equal

Unit Size

Pint (16 oz.)

Quart (32 oz.)

Gallon (128 oz.)

volume of part A

and part B into clean

separate containers.

Maximum VOC content of this product is less than 100 q/L when mixed.

CONTAINS EPOXY RESIN, BRANCHED NONYLPHENOL, AMINES AND PROPYLENE CARBONATE. Causes nose and throat irritation. May cause allergic respiratory reaction. May cause allergic skin reaction. Harmful if swallowed. Use only with adequate ventilation. Avoid breathing dust, vapors, or spray mist. Ensure fresh air entry during application and drying. If you experience eye watering, headache, or dizziness or if air monitoring demonstrates vapor/mist levels are above applicable limits, wear an appropriate, properly fitted respirator (NIOSH approved) during and after application. Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. KEEP OUT OF REACH OF CHILDREN

First Aid In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean contaminated shoes. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical attention immediately. If swallowed, do not induce vomiting. Get medical attention immediately. For emergency, call your physician, local poison control center or local emergency room. For product health information, call: (800)487-4785.

DISPOSAL: Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum Product Support at 1-800-901-0411 for product replacement or a full refund of the purchase price. Refer to product number and batch code. 363902 CHARCOAL



CORPORATION
11 Hawthorn Pkwy., Vernon Hills, IL 60061 800-901-0411 rustoleum.com/varathane Made in USA | Hecho en E.U.A. ©2021 Rust-Oleum Corporation 364183 0121



Varathane. **SUPER GLAZE** ULTRA THICK





POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / PRE-DYED RESIN

Maximum Durability Resists Heat & Chemicals Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more

1 QT (32 FL OZ) 946mL



SUPER GLAZE

ULTRA THICK TINTED FINISH



POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / PRE-DYED RESIN

Maximum **Durability**

Resists Heat & Chemicals

Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more



BREATHTAKING CREATIONS



BEAUTIFUL TABLE TOPS



ENHANCED DECORATIVE PROJECTS



MAXIMUM DURABILITY

Varathane. **SUPER GLAZE Required Tools:**

- 3 plastic or unwaxed paper containers with
- clear volume measurements, smooth walls and flat bottom
- 3 Stir Sticks
- Plastic spreader or squeegee
- Disposable brush
- Waxed paper, newspaper or plastic drop cloth
- · Latex, vinyl, or chemical-resistant safety gloves

Complete instructions included in box

Varathane Super Glaze is an ultra-thick, high gloss, Metallic Blue tinted epoxy that provides maximum durability. Ideal as a waterproof finish for table and bar tops, it is also great for decorative projects and refinishing furniture. It can be used over almost any interior surface: from rough and unfinished to stained, painted or smooth surfaces. Read, understand, and follow all instructions included in this kit before using.



Measure equal

Unit Size

Pint (16 oz.)

Quart (32 oz.)


Gallon (128 oz.)

volume of part A

and part B into clean

separate containers.





Thoroughly mix part A with part B using a clean stir stick.

Sq. Feet*

3.1

6.2

24.8

Pour mixture over the entire surface and spread.

THI	CKNI	: (((M D A	DICUM

One pour of Super Glaze is One coat of regular poly. equal to 75 coats of poly. Dries to .82 mils thick Dries to 61.5 mils thick





*Based on almost 1/16" thickness

Maximum VOC content of this product is less than 100 g/L when mixed.

CONTAINS EPOXY RESIN, BRANCHED NONYLPHENOL, AMINES AND PROPYLENE CARBONATE. Causes nose and throat irritation. May cause allergic respiratory reaction. May cause allergic skin reaction. Harmful if swallowed. Use only with adequate ventilation. Avoid breathing dust, vapors, or spray mist. Ensure fresh air enfry during application and drying. If you experience eye watering, headache, or dizziness or if air monitoring demonstrates vapor/mist levels are above applicable limits, wear an appropriate, properly fitted respirator (NIOSH approved) during and after application. Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. KEEP OUT OF REACH OF CHILDREN

First Aid In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean contaminated shoes. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, oet medical attention immediately. If swallowed, do not induce vomiting, Get medical attention immediately. For emergency, call your physician, local poison control center or local emergency room. For product health information, call: (800)487-4785.

DISPOSAL: Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations. MARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum Product Support at 1-800-901-0411 for product replacement or a full refund of the purchase price. Refer to product number and batch code.

RUST-OLEUM

CORPORATION
11 Hawthorn Pkwy., Vernon Hills, IL 60061
800-901-0411 rustoleum.com/varathane

Made in USA | Hecho en E.U.A. ©2021 Rust-Oleum Corporation 371295 0121



Varathane. Clarathane Super Glaze **SUPER GLAZE** ULTRA THICK TINTED FINISH

ULTRA THICK TINTED FINISH



POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / PRE-DYED RESIN

ONE POUR

COATS OF

METALLIC BLUE

POUR ON HIGH

GLOSS EPOXY

Maximum Durability

Resists Heat & Chemicals

Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more

BEFORE | AFTER

Maximum **Durability**

Resists Heat & Chemicals

EASY 1:1 RATIO / PRE-DYED RESIN

Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more



BREATHTAKING CREATIONS



BEAUTIFUL TABLE TOPS



ENHANCED DECORATIVE PROJECTS



MAXIMUM DURABILITY

Required Tools:

- 3 plastic or unwaxed paper containers with clear volume measurements, smooth walls and flat bottom
- 3 Stir Sticks
- Plastic spreader or squeegee
- Disposable brush
- Waxed paper, newspaper or plastic drop cloth
- Latex, vinyl, or chemical-resistant safety gloves

Complete instructions included in box

Varathane Super Glaze is an ultra-thick, high gloss, Turquoise tinted epoxy that provides maximum durability. Ideal as a waterproof finish for table and bar tops, it is also great for decorative projects and refinishing furniture. It can be used over almost any interior surface: from rough and unfinished to stained, painted or smooth surfaces. Read, understand, and follow all instructions included in this kit before using.



Measure equal

Unit Size

Pint (16 oz.)

Quart (32 oz.)

Gallon (128 oz.)

volume of part A

and part B into clean

separate containers.



A with part B using a


clean stir stick.

Sq. Feet*

3.1

6.2

24.8



Thoroughly mix part Pour mixture

THICKNESS COMPANISON

IHICKNE22 CC	MYAKISUN
One pour of Super Glaze is	One coat of regular poly.
equal to 75 coats of poly.	Dries to .82 mils thick

over the entire

surface and spread.



Dries to 61.5 mils thick



*Based on almost 1/16" thickness

Maximum VOC content of this product is less than 100 q/L when mixed.

CONTAINS EPOXY RESIN, BRANCHED NONYLPHENOL, AMINES AND PROPYLENE CARBONATE. Causes nose and throat irritation. May cause allergic respiratory reaction. May cause allergic skin reaction. Harmful if swallowed. Use only with adequate ventilation. Avoid breathing dust, vapors, or spray mist. Ensure fresh air entry during application and drying. If you experience eye watering, headache, or dizziness or if air monitoring demonstrates vapor/mist levels are above applicable limits, wear and appropriate, properly fitted respirator (NIOSH approved) during and after application. Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. **KEEP OUT OF REACH OF CHILDREN**

First Aid In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean contaminated shoes. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical attention immediately. If swallowed, do not induce vomiting. Get medical attention immediately. For emergency, call your physician, local poison control center or local emergency room. For product health information, call: (800)481-4785.

DISPOSAL: Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

MARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum Product Support at 1-800-901-0411 for product replacement or a full refund of the purchase price. Refer to product number and batch code. 360203 THROUNISE

RUST-OLEUM

CORPORATION
11 Hawthorn Pkwy., Vernon Hills, IL 60061 800-901-0411 rustoleum.com/varathane Made in USA | Hecho en E.U.A. ©2020 Rust-Oleum Corporation 371270 1220



Varathane. **SUPER GLAZE ULTRA THICK**

TINTED FINISH

TURQUOISE



POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / PRE-DYED RESIN

Maximum Durability

Resists Heat & Chemicals

Waterproof


Ideal for: Bars, Tabletops, Decorative Projects, Frames & more

1QT (32 FL OZ) 946mL



SUPER GLAZE

ULTRA THICK TINTED FINISH

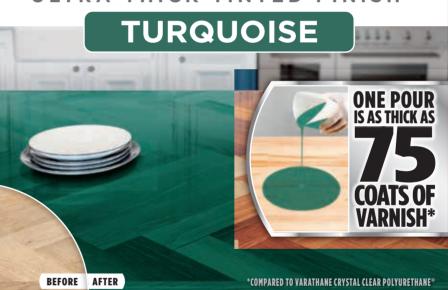

POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / PRE-DYED RESIN

Maximum **Durability**

Resists Heat & Chemicals

Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more



BREATHTAKING CREATIONS



BEAUTIFUL TABLE TOPS



ENHANCED DECORATIVE PROJECTS



MAXIMUM DURABILITY



Required Tools:

- 3 plastic or unwaxed paper containers with clear volume measurements, smooth walls and flat bottom
- 3 Stir Sticks
- Plastic spreader or squeegee
- Disposable brush
- Waxed paper, newspaper or plastic drop cloth
- · Latex, vinyl, or chemical-resistant safety gloves

Complete instructions included in box

Varathane Super Glaze is an ultra-thick, high gloss, Aged Wood tinted epoxy that provides maximum durability. Ideal as a waterproof finish for table and bar tops, it is also great for decorative projects and refinishing furniture. It can be used over almost any interior surface: from rough and unfinished to stained, painted or smooth surfaces. Read, understand, and follow all instructions included in this kit before using.



Measure equal

Unit Size

Pint (16 oz.)

Quart (32 oz.)


Gallon (128 oz.)

volume of part A

and part B into clean

separate containers.





Thoroughly mix part A with part B using a clean stir stick.

Sq. Feet*

3.1

6.2

24.8

Pour mixture over the entire surface and spread.

THICKNESS COMPARISON

One pour of Super Glaze is One coat of regular poly. equal to 75 coats of poly. Dries to .82 mils thick Dries to 61.5 mils thick





*Based on almost 1/16" thickness

Maximum VOC content of this product is less than 100 q/L when mixed.

CONTAINS EPOXY RESIN, BRANCHED NONYLPHENOL, AMINES AND PROPYLENE CARBONATE. Causes nose and throat irritation. May cause allergic respiratory reaction. May cause allergic skin reaction. Harmful if swallowed. Use only with adequate ventilation. Avoid breathing dust, vapors, or spray mist. Ensure fresh air entry during application and drying. If you experience eye watering, headache, or dizziness or if air monitoring demonstrates vapor/mist levels are above applicable limits, wear and appropriate, properly fitted respirator (NIOSH approved) during and after application. Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. **KEEP OUT OF REACH OF CHILDREN**

First Aid In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean contaminated shoes. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical attention immediately. If swallowed, do not induce vomiting. Get medical attention immediately. For emergency, call your physician, local poison control center or local emergency room. For product health information, call: (800)481-4785.

DISPOSAL: Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

MARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum Product Support at 1-800-901-0411 for product replacement or a full refund of the purchase price. Refer to product number and batch code. 363904 AGED WOOD



CORPORATION
11 Hawthorn Pkwy., Vernon Hills, IL 60061 800-901-0411 rustoleum.com/varathane Made in USA | Hecho en E.U.A. ©2020 Rust-Oleum Corporation 371273 1220





TINTED FINISH

AGED WOOD



POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / PRE-DYED RESIN

Maximum Durability

Resists Heat & Chemicals

Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more

1QT (32 FL OZ) 946mL



SUPER GLAZE

ULTRA THICK TINTED FINISH



POUR ON HIGH GLOSS EPOXY

EASY 1:1 RATIO / PRE-DYED RESIN

Maximum **Durability**

Resists Heat & Chemicals

Waterproof

Ideal for: Bars, Tabletops, Decorative Projects, Frames & more



BREATHTAKING CREATIONS



BEAUTIFUL TABLE TOPS



ENHANCED DECORATIVE PROJECTS



MAXIMUM DURABILITY



