



# SS-10

PRODUCT  
DATA SHEET

## 10% SILANE-SILOXANE SEALER

**DESCRIPTION:** A silicone-modified waterproofer designed to provide long-lasting protection for uncoated horizontal and vertical concrete and masonry surfaces.

**Typical Uses:**

- ✓ Concrete
- ✓ Exposed Aggregate
- ✓ Sandstone
- ✓ Brick & Stucco
- ✓ Concrete Block
- ✓ Unglazed Tile
- ✓ Terra Cotta
- ✓ Slate
- ✓ Sidewalks
- ✓ Patios & Porches
- ✓ Driveways
- ✓ Pavers
- ✓ Bridges
- ✓ Parking Garages
- ✓ Precast Concrete Walls
- ✓ Stadiums

**Important:** Read all directions thoroughly. Recommended: wear gloves, safety glasses and protective clothing.

**SURFACE PREP:** All surfaces must be clean, dry and oil-free. For oil stains, use a degreaser or SEAL-KRETE Oil Stain Remover. Do not apply to painted or stained surfaces. Make sure all cure and seal compounds have been removed. Cover windows, doors, etc., prior to application. Use caution when applying on windy days. Remove any overspray immediately with water. New concrete must cure for a minimum of 30 days.

*Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or [www.epa.gov/lead](http://www.epa.gov/lead).*

**APPLICATION:** Read "LIMITATIONS" section before use. This sealer is ready to use; do not dilute. Apply to porous, bare, uncoated concrete and masonry surfaces only. Do not apply to non-porous substrates or smooth troweled concrete where penetration of the product will not be sufficient. Apply until saturated using a roller or low-pressure garden sprayer. Two coats are recommended. Apply second coat immediately after first coat is applied and backrolled; while first coat is still wet. Backroll after second coat. On vertical surfaces, apply from the bottom up and saturate well.

**3/8" Nap Roller:** Dampen roller, remove excess water, then saturate roller with product. Keep a wet edge while rolling. Do not allow to puddle, foam or run. While the first coat is still wet, apply a second coat to maximize protection. Remove any puddles by back rolling the entire surface area.

**Pump Sprayer:** Set at a fine spray and apply using a circular motion. To eliminate puddling or to achieve a more uniform finish, backroll immediately after spraying.

**Professional HVLP Spray Applications:** Pressure wash to remove all mildew. Inspect and repair mortar joints. Tape all windows using 2 mil plastic sheeting. Set air pressure to 25–35 psi using a stain tip .013. Apply two flood coats starting at the bottom and working up to the top, backrolling immediately. Keep cars a safe distance away as overspray is hard to remove.

**COVERAGE:** 150-400 sq. ft. per gallon, depending on surface porosity.

**DRY TIME:** Allow surface to dry 12 hours for light foot traffic. Will accept vehicular traffic in 24 hours. Measured at 77°F (25°C) 50% RH. Fully cured in three weeks.

**CLEAN-UP & STORAGE:** Clean all application tools immediately after use with soap and water. Do not store at temperatures below 50°F (10°C). KEEP FROM FREEZING.

**LIMITATIONS:** Do not apply when the temperature of the surface to be coated is less than 50°F (10°C) or when temperature is expected to drop below 50°F (10°C) within 24 hours. Do not apply in wet or rainy conditions or if rain is forecast within 24 hours. Do not use below grade. Do not apply to glazed non porous surfaces. Not recommended as a topcoat over painted surfaces. Do not apply to sealed, painted or stained surfaces. Do not use on wood.

**CAUTION: WARNING! IRRITANT! HARMFUL IF SWALLOWED. MAY CAUSE EYE, NOSE AND THROAT IRRITATION. AVOID CONTACT WITH SKIN AND EYES AND AVOID BREATHING OF VAPORS AND SPRAY MIST. WEAR EYE PROTECTION AND PROTECTIVE CLOTHING.** To avoid breathing vapors open windows and doors or use other means to ensure fresh air entry during application and drying.

**FIRST AID: For Eye Contact:** Flush with water for 15 minutes. **For Skin Contact:** Prolonged contact may cause irritation. Wash affected area with soap and water. **If Swallowed:** Do not induce vomiting – seek immediate medical attention. **Inhalation:** If headache or nausea is experienced, remove the individual to fresh air. If symptoms persist, seek medical attention.

**CAUTION: KEEP OUT OF REACH OF CHILDREN – DO NOT TAKE INTERNALLY**



Product	No.	Unit	UPC Code	Carton Bar Code	Carton Size (W x D x H)	Cube / Wt. ( cubic ft / lbs )	Carton Qty	Pallet Qty
SS-10 10% Silane-Siloxane Sealer	810005	5 gal	0 15944 81005 9	—	—	1.30/44.07	—	36 ea

# SEAL KRETE®

# SS-10

## 10% SILANE-SILOXANE SEALER

- PRO-GRADE DURABILITY
- INTERIOR/EXTERIOR USE
- FOR POROUS UNCOATED
- HORIZONTAL & VERTICAL SURFACES

### TECHNICAL INFORMATION

- Clean-up: soap and water
- Shelf Life: one year
- Visual Appearance: milky white (wet); dries clear
- Tire marking: resistant to most tires
- Silane-Siloxane
- ASTM D-6489 waterproofing masonry
- VOC < 100 g/L – EPA Method 24 – Low Solids Waterproofing Sealer Category

### FEATURES

- Invisible water repellent
- Penetrates, bonds and seals porous uncoated surfaces
- Interior or exterior use
- Horizontal and vertical surfaces
- UV resistant
- Mold & mildew resistant

### LIQUID PROPERTIES

- 10% solids by weight
- PH 8.75

**LIMITED 5-YEAR WARRANTY:** A limited 5-year warranty is available on the quality and performance of this product on a per job basis. Contact our technical service department for details on this warranty program prior to using product. Otherwise, manufacturer/seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of SEAL-KRETE product or refund of purchase price. Rust-Oleum will not be responsible for labor or the cost of labor for removal or application of any product.

**TECHNICAL SUPPORT:** For more information on surface prep or application guidelines, or to obtain a Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am–5:00 pm EST) or visit our website at [www.seal-krete.com](http://www.seal-krete.com).

**MEETS ASTM STANDARDS FOR WATER REPELLENCY**

**PENETRATES BONDS & SEALS**


**NO PEELING, NO HOT TIRE PICK-UP**

**IDEAL FOR COMMERCIAL CONCRETE & MASONRY STRUCTURES**

UNPROTECTED CONCRETE IS SUBJECT TO DAMAGE AND DISCOLORATION



SS-10 PROTECTS CONCRETE FROM SALT AND WATER DAMAGE

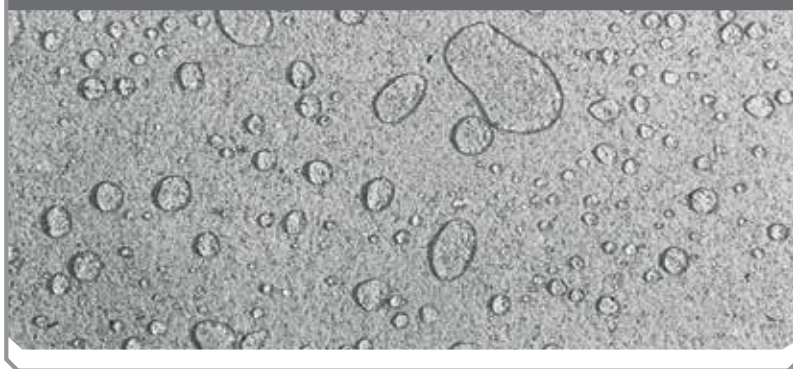

**RUST-OLEUM®**  
CORPORATION

11 Hawthorn Pkwy., Vernon Hills, IL 60061

Questions or comments? Call 1-800-323-7357

[www.seal-krete.com](http://www.seal-krete.com)

©2016 Rust-Oleum Corp

64065-012717-SK