
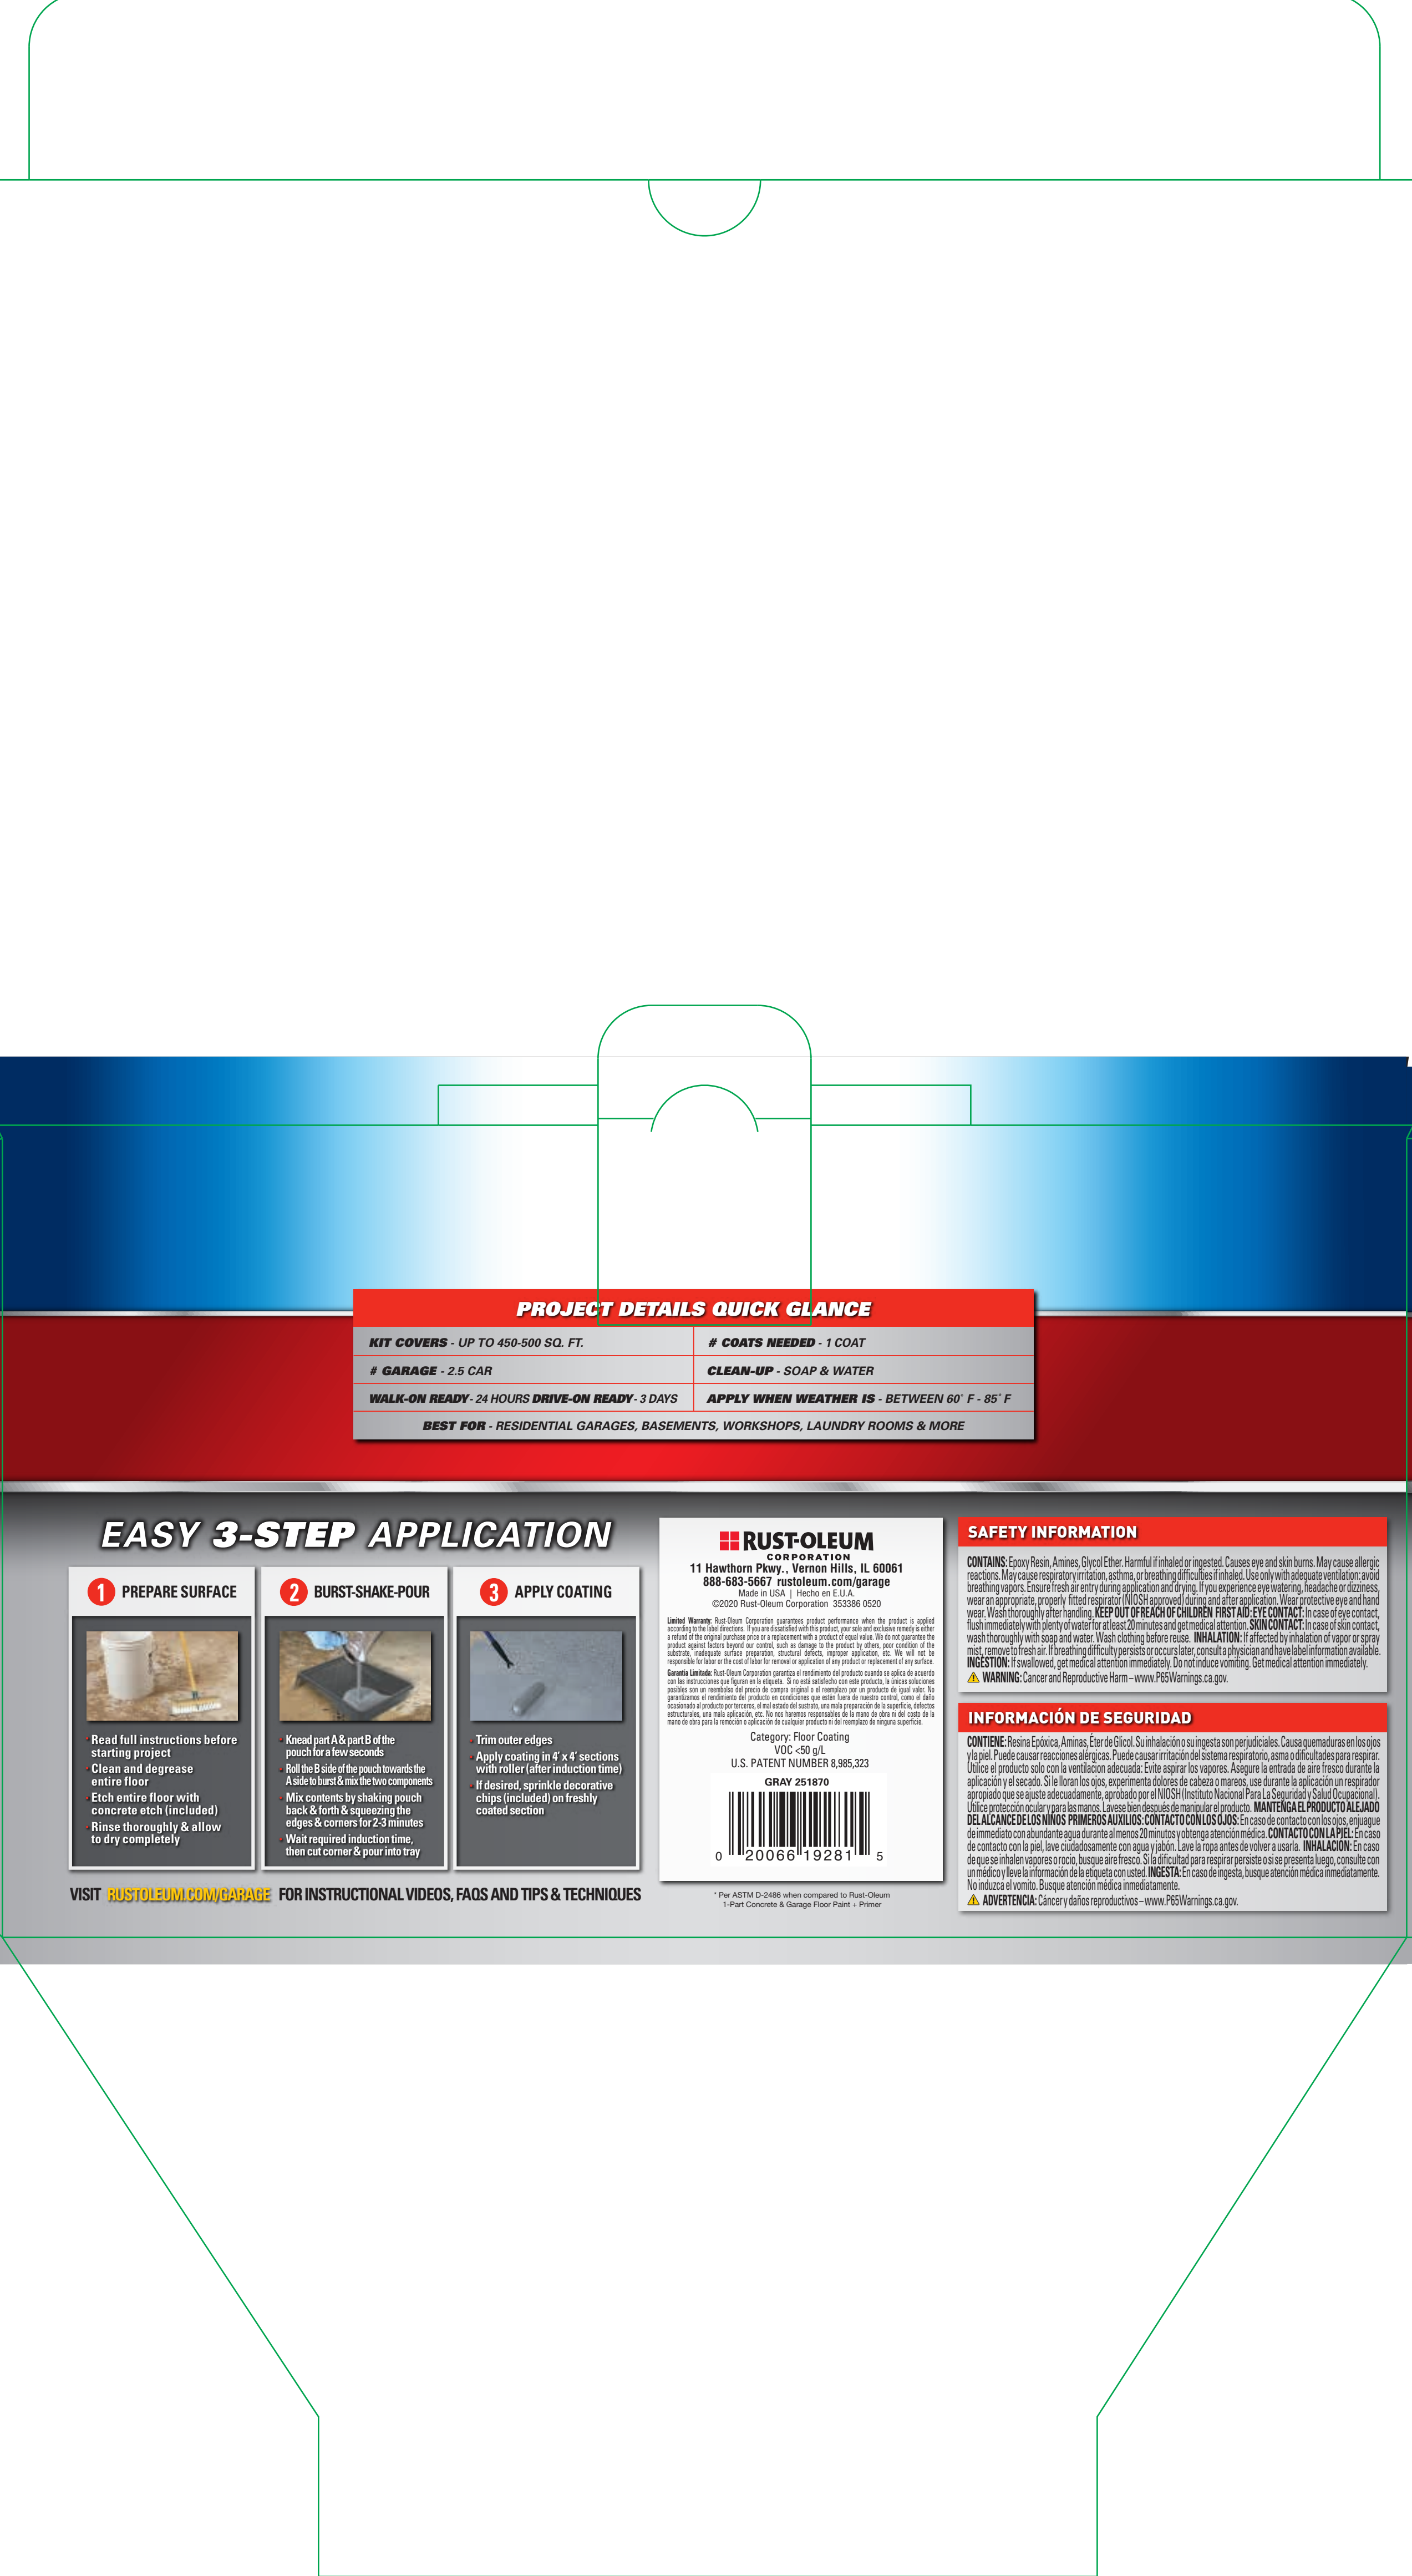




PROJECT DETAILS QUICK GLANCE	
KIT COVERS - UP TO 450-500 SQ. FT.	# COATS NEEDED - 1 COAT
# GARAGE - 2.5 CAR	CLEAN-UP - SOAP & WATER
WALK-ON READY - 24 HOURS DRIVE-ON READY - 3 DAYS	APPLY WHEN WEATHER IS - BETWEEN 60° F - 85° F
BEST FOR - RESIDENTIAL GARAGES, BASEMENTS, WORKSHOPS, LAUNDRY ROOMS & MORE	

EASY 3-STEP APPLICATION

- 1 PREPARE SURFACE**

Read full instructions before starting project.
Clean and degrease entire floor.
Etch entire floor with concrete etch (included).
Rinse thoroughly & allow to dry completely.
- 2 BURST-SHAKE-POUR**

Knead part A & part B of the pouch for a few seconds.
Roll in & shake the pouch towards the side to blend & mix the two components.
Mix contents by shaking pouch back & forth & squeezing the edges & corners for 2-3 minutes.
Wait required induction time, then cut corner & pour into tray.
- 3 APPLY COATING**

Trim outer edges.
Apply coating in 4' x 4' sections with roller (after induction time).
If desired, sprinkle decorative chips (included) on freshly coated section.

VISIT RUSTOLEUM.COM/GARAGE FOR INSTRUCTIONAL VIDEOS, FAQs AND TIPS & TECHNIQUES

RUST-OLEUM CORPORATION

11 Hawthorne Plaza, Vernon Hills, IL 60061
888-583-5667 rustoleum.com/garage

Made in USA | Hecho en E.U.A.
©2020 Rust-Oleum Corporation. 353386 1620

United Warranty: Rust-Oleum Corporation guarantees product performance when the product is applied according to the label directions. Rust-Oleum disclaims any liability for any and all damages resulting from a third party's application of the product or from the product's use. Rust-Oleum does not guarantee the product against future injury or damage, such as damage to the product by others, poor quality of the substrate, improper surface preparation, improper mixing, improper application, etc. We will not be responsible for labor or the cost of labor for removal or replacement of any product or replacement of any surface.

Garage Labels: Rust-Oleum Corporation guarantees product performance when product is applied to the surface as directed on the label. Rust-Oleum disclaims any liability for any and all damages resulting from a third party's application of the product or from the product's use. Rust-Oleum does not guarantee the product against future injury or damage, such as damage to the product by others, poor quality of the substrate, improper surface preparation, improper mixing, improper application, etc. We will not be responsible for labor or the cost of labor for removal or replacement of any product or replacement of any surface.

Category: Floor Coating
VOC: <50 g/L
U.S. PATENT NUMBER: 8,985,323
GRAY 251870



* Per ASTM D-2885, when compared to Rust-Oleum
1-Part Concrete & Garage Floor Paint - Primer

SAFETY INFORMATION

CONTAINS: Epoxy Resin, Amine, Glycid Ether, Harmful if inhaled or ingested. Causes eye and skin burns. May cause allergic reactions. May cause respiratory irritation, asthma, or breathing difficulties if inhaled. Use only with adequate ventilation; avoid breathing vapors. Extended use may cause dizziness and fatigue. If you experience eye watering, headache or dizziness, wear an appropriate, properly fitted respirator (NIOSH approved) during and after application. Wear protective eye and hand wear. Wash thoroughly after handling. **KEEP OUT OF REACH OF CHILDREN. FIRST AID: EYE CONTACT:** In case of eye contact, wash thoroughly with soap and water. **Most coating before use.** **IRITATION:** Irritation by inhalation of vapor or spray mist, respiratory irritation. If breathing difficulty persists or occurs later, consult a physician and have that information available. **INGESTION:** If swallowed, get medical attention immediately. Do not induce vomiting. Get medical attention immediately. **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

INFORMACIÓN DE SEGURIDAD

CONTIENE: Resinas Epoxicas, Aminas, Éteres Glicídicos. Si inhala los vapores o se expone a los productos, puede causar irritación de la piel. Puede causar reacciones alérgicas. Puede causar irritación del sistema respiratorio, asma o dificultades para respirar. Evite el producto solo con la ventilación adecuada. Evite respirar los vapores. Alguna le entorpecerá de vez en cuando la aplicación y el cansancio. Si lo borra los ojos, exponerlos debajo de la ducha o manguera, use durante la aplicación un respirador aprobado que se ajuste adecuadamente, aprobado por el NIOSH (Instituto Nacional para la Seguridad y Salud Ocupacional). Use protección ocular para los ojos. Lávase las manos después de manipular el producto. **MANTENGA FUERTEMENTE ALEJADO DEL ALCAÑICE LOS NIÑOS. CONTACTO CON LOS OJOS:** En caso de contacto con los ojos, enjuague con mucho agua durante al menos 15 minutos. **CONTACTO CON LA PIEL:** En caso de contacto con la piel, lave cuidadosamente con agua y jabón. Lave las ropas antes de volver a usarlas. **IRITACIÓN:** En caso de que aparezcan vapores o neblina, evite el uso. Si el uso prolongado produce irritación o si se presentan alergias, consulte con un médico y lleve la información de seguridad con usted. **INGESTIÓN:** En caso de ingestión, no induzca el vomito. Busque atención médica inmediatamente. **ADVERTENCIA:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

FEATURES & BENEFITS	
DRIVE ON IN 3 DAYS	1 COAT APPLICATION
NO HOT TIRE PICK-UP	PROVIDES AN EASY-TO-CLEAN SHOWROOM QUALITY APPEARANCE
ABRASION & CHEMICAL RESISTANT	WATERPROOFING SEALER

GARAGE FLOOR COATING KIT

VALUE PACK!

2 1/2 CAR GARAGE KIT




COVERS UP TO 450-500 SQ. FT.

KIT INCLUDES
2-PART EPOXY FLOOR SYSTEM,
CONCRETE ETCH,
DECORATIVE COLOR CHIPS,
AND INSTRUCTION SHEET



Rust-Oleum® CROSS-LINKING TECHNOLOGY™

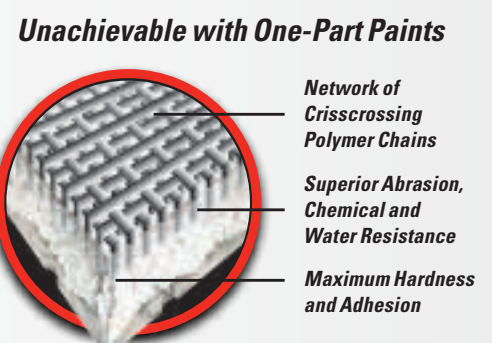

Unachievable with One-Part Paints
Network of Crosslinking Polymer Chains
Superior Abrasion, Chemical and Water Resistance
Maximum Hardness and Adhesion
Rust-Oleum® CROSS-LINKING TECHNOLOGY™ FORMS A BOND THAT IS STRONGER THAN CONCRETE & HELPS PREVENT CONCRETE FROM CHIPPING, CRACKING & DUSTING.

RUST-OLEUM® EPOXYSHIELD®

*1 TRUSTED BRAND FOR PROTECTION

GARAGE FLOOR COATING KIT



OTHER SUPPLIES NEEDED

- ☐ Stiff bristle broom or scrub brush
- ☐ Roller frame, tray, 3/8" nap cover
- ☐ Extension pole
- ☐ Squeegee (for the most effective cleaning and to speed drying)

OPTIONAL

- ☐ Rust-Oleum® Cleaner & Degreaser
- ☐ Rust-Oleum® Anti-Skid Additive
- ☐ Rust-Oleum® Concrete Patch & Repair
- ☐ Additional Rust-Oleum® Decorative Chips



RUST-OLEUM® EPOXYSHIELD®

*1 TRUSTED BRAND FOR PROTECTION

GARAGE FLOOR COATING KIT



No Hot-Tire Pick Up
Excellent Wear & Chemical Resistance
100% Satisfaction Guarantee

1.875 GALLONS (240 FL.OZ./7.1L)

KIT INCLUDES: 2-PART EPOXY FLOOR SYSTEM, CONCRETE ETCH, DECORATIVE CHIPS AND INSTRUCTION SHEET (ENGLISH/ESPAÑOL)



KIT COVERS: UP TO 450-500 SQ. FT.

DANGER! CAUSES EYE AND SKIN BURNS. VAPOR HARMFUL. READ OTHER CAUTIONS ON THE BACK PANEL.
PELIGRO! CAUSA QUEMADES EN LA PIEL Y LOS OJOS. LOS VAPORES SON DAÑINOS PARA LA SALUD. LEA OTROS PRECAUTELAS EN LA PARTE POSTERIOR.

VALUE PACK!

2 1/2 CAR GARAGE KIT



COVERS UP TO 450-500 SQ. FT.

KIT INCLUDES
2-PART EPOXY FLOOR SYSTEM,
CONCRETE ETCH,
DECORATIVE COLOR CHIPS,
AND INSTRUCTION SHEET

VALUE PACK!

2 1/2 CAR GARAGE KIT



COVERS UP TO 450-500 SQ. FT.

KIT INCLUDES
2-PART EPOXY FLOOR SYSTEM,
CONCRETE ETCH,
DECORATIVE COLOR CHIPS,
AND INSTRUCTION SHEET



RUST-OLEUM® EPOXYSHIELD®

*1 TRUSTED BRAND FOR PROTECTION

GARAGE FLOOR COATING KIT



No Hot-Tire Pick Up
Excellent Wear & Chemical Resistance
100% Satisfaction Guarantee

1.875 GALLONS (240 FL.OZ./7.1L)

KIT INCLUDES: 2-PART EPOXY FLOOR SYSTEM, CONCRETE ETCH, DECORATIVE CHIPS AND INSTRUCTION SHEET (ENGLISH/ESPAÑOL)



KIT COVERS: UP TO 450-500 SQ. FT.

DANGER! CAUSES EYE AND SKIN BURNS. VAPOR HARMFUL. READ OTHER CAUTIONS ON THE BACK PANEL.
PELIGRO! CAUSA QUEMADES EN LA PIEL Y LOS OJOS. LOS VAPORES SON DAÑINOS PARA LA SALUD. LEA OTROS PRECAUTELAS EN LA PARTE POSTERIOR.

VALUE PACK!

2 1/2 CAR GARAGE KIT



COVERS UP TO 450-500 SQ. FT.

KIT INCLUDES
2-PART EPOXY FLOOR SYSTEM,
CONCRETE ETCH,
DECORATIVE COLOR CHIPS,
AND INSTRUCTION SHEET