



BEST FOR	Garages, Basements, Workshops, Laundry Rooms, Mud Rooms and More
SUBSTRATES	Concrete, Wood, & Tile (see instructions for proper surface preparation)
KIT COVERAGE	Up to 200-250 Sq. Ft.
# GARAGE	1 Car

PROJECT DETAILS QUICK GLANCE

WALK-ON READY	> 8-10 Hours
DRIVE READY	> 1 Day
# COATS NEEDED	> 1 Coat
APPLY WHEN TEMPERATURE IS	> BETWEEN 40°-90° F



GARAGE FLOOR COATING KIT

GARAGE FLOOR COATING KIT

GARAGE FLOOR COATING KIT

GARAGE FLOOR COATING KIT

RUST-OLEUM CORPORATION
11 Hawthorn Pkwy., Vernon Hills, IL 60061
888-683-5667 rustoleum.com/garage
Made in USA | Hecho en E.U.A.
©2020 Rust-Oleum Corporation 365276 0420

Limited Warranty: Rust-Oleum Corporation guarantees product performance when the product is applied according to the label directions. It is not warranted that the product, your application or results will be better than the original purchase price or a replacement with a product of equal value. We do not guarantee the product against future repairs or claims. Such as damage to the product, the surface, your vehicle or the property, and/or damage to the property, structure, contents, equipment, appliances, etc. You will be responsible for obtaining the correct label for removal or application of any product or replacement of any surface.

Garantía Limitada: Rust-Oleum Corporation garantiza el rendimiento del producto cuando se aplica de acuerdo con las instrucciones que figuran en la etiqueta. Si no está satisfecho con este producto, lo puede devolver o reemplazar con un producto de igual valor. No garantizamos el rendimiento del producto en condiciones que están fuera de nuestro control, como el daño ocasional al producto por terceros, el mal estado del sustrato, una mala preparación de la superficie, efectos atmosféricos, una mala aplicación, etc. No nos hacemos responsables de la mano de obra ni del costo de la mano de obra para la remoción o aplicación de cualquier producto o del reemplazo de ninguna superficie.

Category: Floor Coating
VOC < 1 g/L (0.01 lbs/gal)
*Formulated without addition of VOC containing solvent.
*Formulado sin añadir solvente que contenga COV.
U.S. PATENT NUMBER 6,985,323

ROCKSOLID GRAY 365189



SAFETY INFORMATION

BEFORE OPENING THE PACKAGE, READ ALL WARNING LABELS AND DATA SHEETS. FOLLOW ALL PRECAUTIONS.

KEEP OUT OF REACH OF CHILDREN AND ANIMALS.

DO NOT TAKE INTERNALLY.

DANGER: CONTAINS: POLYCURAMINE[®] RESIN, PROPRIETARY RESIN BLEND, GLUCOL ETHER, POLYETHERAMINE, BENZYL ALCOHOL, HARMFUL IF INHALED OR INGESTED. CAUSES EYE AND SKIN BURNS. MAY CAUSE ALLERGIC REACTIONS. MAY CAUSE RESPIRATORY IRRITATION. ASTHMA OR BREATHING DIFFICULTIES IF INHALED. **USE ONLY WITH ADEQUATE VENTILATION.** AVOID BREATHING VAPORS. ENSURE FRESH AIR ENTRY DURING APPLICATION AND DRYING. KEEP AWAY FROM HEAT, SPARKS AND FLAME. VAPOR MAY CAUSE FLASH FIRE. DO NOT SMOKE IF YOU EXPERIENCE EYE WATERING, HEADACHE OR DIZZINESS. WEAR AN APPROPRIATELY FITTED RESPIRATOR (NIOSH APPROVED) DURING AND AFTER APPLICATION. WEAR PROTECTIVE EYE AND HAND WEAR. WASH THOROUGHLY AFTER HANDLING.

FIRST AID:
EYE CONTACT: IN CASE OF EYE CONTACT, FLUSH IMMEDIATELY WITH PLENTY OF WATER FOR AT LEAST 20 MINUTES AND GET MEDICAL ATTENTION.

SKIN CONTACT: IN CASE OF SKIN CONTACT, WASH THOROUGHLY WITH SOAP AND WATER. WASH CLOTHING BEFORE REUSE. THOROUGHLY CLEAN OR DESTROY CONTAMINATED SHIES.

INHALATION: IF AFFECTED BY INHALATION OF VAPOR OR SPRAY MIST, REMOVE TO FRESH AIR. IF BREATHING DIFFICULTY PERSISTS OR SEVERE, CONSULT A PHYSICIAN AND HAVE LABEL INFORMATION AVAILABLE.

INGESTION: IF SWALLOWED, GET MEDICAL ATTENTION IMMEDIATELY. DO NOT INDUCE VOMITING. GET MEDICAL ATTENTION IMMEDIATELY.

WARNING: CANCER AND REPRODUCTIVE HARM - WWW.P65WARNINGS.CA.GOV.
EMERGENCY TELEPHONE: 1-800-424-1300

INFORMACIÓN DE SEGURIDAD

ANTES DE ABRIR EL ENVASE, LEA TODAS LAS ETIQUETAS DE ADVERTENCIA Y LAS PRECAUCIONES QUE SE ENCONTREN EN EL ENVASE.

MANTENGA EL PRODUCTO FUERA DEL ALCANCE DE LOS NIÑOS Y DE LOS ANIMALES. NO LO INGERA.

ADVERTENCIA: CONTIENE: RESINA POLYCURAMINE[®], COMBINACIÓN PATENTADA DE RESINAS, ÉTER DE GLICOL, POLIETERAMINA, ALCOHOL DE BENZIL, SU INHALACIÓN O SU INGESTIÓN SIN PRECAUCIONES CAUSA IRRITACIÓN OCULAR Y DOLOR. PUEDE CAUSAR REACCIONES ALÉRGICAS. EN CASO DE QUE SE INHALE EL PRODUCTO, PUEDE CAUSAR IRRITACIÓN DEL SISTEMA RESPIRATORIO, ASMA O DIFICULTADES PARA RESPIRAR. **USAR SOLAMENTE CON VENTILACIÓN ADECUADA.** EVITE LA INHALACIÓN DE VAPORES. ASEGURE EL INGRESO DE AIRE FRESCO DURANTE LA APLICACIÓN Y SECAO. MANTENGA EL PRODUCTO ALEJADO DEL CALOR DE LAS CHISPAS Y DE LAS LLAMAS. LOS VAPORES PUEDEN CAUSAR COMBUSTIÓN INSTANTÁNEA. NO FUME. SI EXPERIMENTA LAGRIMOS DE LOS OJOS, DOLOR DE CABEZA O MAREOS, UTILICE UN RESPIRADOR APROPIADO, CON UN AJUSTE ADECUADO (APROBADO POR NIOSH) DURANTE Y DESPUÉS DE LA APLICACIÓN. UTILICE PROTECCIÓN ADECUADA PARA LOS OJOS Y MANOS. LÁVASE BIEN DESPUÉS DE MANIPULAR.

PRIMEROS AUXILIOS:
CONTACTO CON LOS OJOS: EN CASO DE CONTACTO CON LOS OJOS, ENJUAGUE DE INMEDIATO CON ABUNDANTE AGUA DURANTE AL MENOS 20 MINUTOS Y OBTENGA ATENCIÓN MÉDICA.

CONTACTO CON LA PIEL: EN CASO DE CONTACTO CON LA PIEL, LÁVASE CUIDADOSAMENTE CON AGUA Y JABÓN. LÁVE LA ROPA ANTES DE VOLVER A USARLA. LÁVSE CUIDADOSAMENTE O DESTROYA LOS ROPA CONTAMINADAS.

INHALACIÓN: EN CASO DE QUE SE INHALEN VAPORES O ROCCO, BUSQUE AIRE FRESCO. SI LA DIFICULTAD PARA RESPIRAR PERSISTE O SE PRESENTA LUEGO, CONSULTE CON UN MÉDICO Y LLEVE CONSIGO LA INFORMACIÓN DE LA ETIQUETA.


INGESTIÓN: EN CASO DE INGESTIÓN, BUSQUE ATENCIÓN MÉDICA INMEDIATAMENTE. NO INDUCE EL VÓMITO. BUSQUE ATENCIÓN MÉDICA INMEDIATAMENTE.

ADVERTENCIA: CÁNCER Y DAÑOS REPRODUCTIVOS - WWW.P65WARNINGS.CA.GOV.
TELÉFONO DE EMERGENCIA: 1-800-424-1300

The revolutionary RockSolid Polycuramine[®] combines key attributes from multiple chemistries into one. This creates a durable, self-leveling, fast curing, extreme high gloss coating system, that can be completed in one day.

20X STRONGER THAN EPOXY

POLYCURAMINE[®] TECHNOLOGY

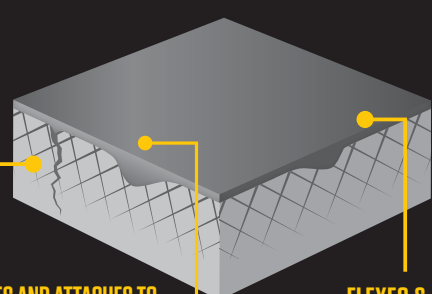

PENETRATES AND ATTACHES TO CONCRETE ON A MOLECULAR LEVEL FORMING MULTIPLE BONDING POINTS

SELF-LEVELING

FLEXES & MOVES WITH THE CONCRETE TO PREVENT CRACKING OR PEELING

20X STRONGER THAN EPOXY

DRIVE ON IN 1 DAY

INDUSTRIAL-GRADE
POLYCURAMINE[®]

No Hot Tire Pick-Up

Superior Impact & Chemical Resistance

Limited Lifetime Warranty

Showroom Quality Finish

EXTREME
HIGH GLOSS

2.8 QTS (90 FL OZ / 2.66L)

KIT INCLUDES: POLYCURAMINE POUCH,
CONCRETE ETCH, DECORATIVE CHIPS,
ROLLER, INSTRUCTION SHEET (ENGLISH/ESPAÑOL)

GRAY
HIGH GLOSS

KIT COVERS: UP TO
200-250 SQ. FT.

DANGER: VAPOR HARMFUL AND CAUSES EYE AND SKIN BURNS. READ CAREFULLY OTHER CAUTIONS ON BACK PANEL.
PELIGRO: VAPOR DAÑINO Y CAUSA QUEMADURAS EN LA PIEL Y LOS OJOS.
LEA ATENTAMENTE LAS ADVERTENCIAS ADICIONALES EN LA PARTE POSTERIOR.

EASY 3-STEP APPLICATION

1 PREPARE SURFACE



- Clean and degrease entire floor
- Scrub heavily-soiled areas
- Etch entire floor with concrete etch (included)
- Rinse thoroughly & allow to dry completely

2 BURST-SHAKE-POUR



- Roll side A of pouch toward side B to burst and mix the two components
- Mix contents by shaking pouch back and forth and squeezing the edges and corners for 2-3 minutes
- Cut off one corner and pour out a ribbon onto the floor

3 APPLY COATING



- Trim outer edges
- Apply coating in 4' x 4' sections with roller (included)
- If desired, sprinkle decorative chips (included) on freshly coated section

VISIT RUSTOLEUM.COM/GARAGE FOR INSTRUCTIONAL VIDEOS, FAQs AND TIPS & TECHNIQUES

• TRUSTED QUALITY SINCE 1921 •

RUST-OLEUM[®]

ROCKSOLID[®]

THE WORLD'S TOUGHEST COATINGS[™]

GARAGE FLOOR COATING KIT



KIT INCLUDES:



OTHER SUPPLIES NEEDED:

- | | |
|--|--|
| ☐ ROLLER FRAME | OPTIONAL: |
| ☐ EXTENSION POLE | ☐ ANTI-SKID ADDITIVE |
| ☐ STIFF BRISTLED BROOM OR SCRUB BRUSH | ☐ HEAVY-DUTY DEGREASER |
| ☐ 3" PAINT BRUSH | ☐ CONCRETE PATCH AND REPAIR |

✓ NO PEEL
PROMISE

• TRUSTED QUALITY SINCE 1921 •


RUST-OLEUM[®]

ROCKSOLID[®]

THE WORLD'S TOUGHEST COATINGS[™]

1 CAR
GARAGE KIT

EASY MIX BURST POUCH!

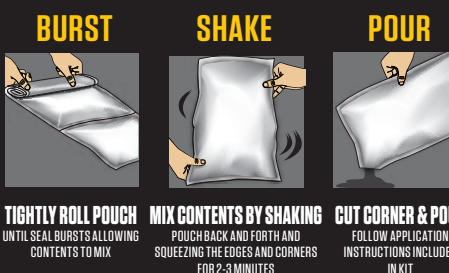

TIGHTLY ROLL POUCH
UNTIL SEAL BURSTS ALLOWING
CONTENTS TO MIX

MIX CONTENTS BY SHAKING
POUCH BACK AND FORTH AND
SQUEEZING THE EDGES AND CORNERS
FOR 2-3 MINUTES

CUT CORNER & POUR
FOLLOW APPLICATION
INSTRUCTIONS INCLUDED
IN KIT